



PRODUCT CATALOG 2015



Strong, sealed 1,5 HP motor

Ergonomic cam action freespooling clutch



Handlebar switch and mounting plate

Circuit breaker protected and weather sealed solenoid contact

PW3500

With winch you get:


- Wire rope 5,5 mm x 10 m
- Hook
- Roller fairlead
- Control box
- Cables set
- Wire remote control (handlebar switch)
- Mounting plate
- Mounting screws set
- User manual
- Warranty card

Powerful, versatile and easy to use compact winch. Several additional features, including dynamic braking and low amp draw system, ensure big performance at a surprisingly affordable price.

Providing efficient pulling power whenever and wherever you need it, the PW3500 winch features a high efficiency, low amp draw sealed permanent magnetic motor. This combined with the unit's solenoid, which disconnects your winch's electrical system from the battery when your vehicle is turned off, as well as circuit breaker protection ensures that users will always have all the power that they need without taking a toll on their ATV's battery.



Specifications

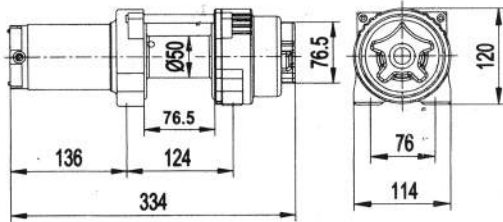

Rated line pull:	1588 kg
Motor:	Series wound 1,5 KM
Voltage:	12V
Gear:	3-stage planetary
Gear ratio:	198:1
Brake:	automatic in the drum
Wire rope:	5,5mm x 10m
Fairlead:	4-way roller
Remote:	wired
Dimensions:	334mm x 114mm x 120mm
Drum dimensions:	50mm x 76,5mm
Mounting bolt pattern:	124mm x 76mm
Weight:	8 kg
Motor current draw:	0kg - 15A; 1588kg - 150
Line speed:	0kg - 4.9 m/min; 1588 kg - 1.8 m/min
Warranty:	2 years



Strong, sealed 1,5 HP motor

Ergonomic cam action freespooling clutch



Handlebar switch
and
mounting plate

Circuit breaker protected and weather
sealed solenoid contact

PW3500SR

With winch you get:


- Synthetic rope 5 mm x 10 m
- Hook
- Aluminum hawse
- Control box
- Cables set
- Wire remote control (handlebar switch)
- Mounting plate
- Mounting screws set
- User manual
- Warranty card

Powerful, versatile and easy to use compact winch. Several additional features, including dynamic braking and low amp draw system, ensure big performance at a surprisingly affordable price.

Providing efficient pulling power whenever and wherever you need it, the PW3500 winch features a high efficiency, low amp draw sealed permanent magnetic motor. This combined with the unit's solenoid, which disconnects your winch's electrical system from the battery when your vehicle is turned off, as well as circuit breaker protection ensures that users will always have all the power that they need without taking a toll on their ATV's battery.



Specifications

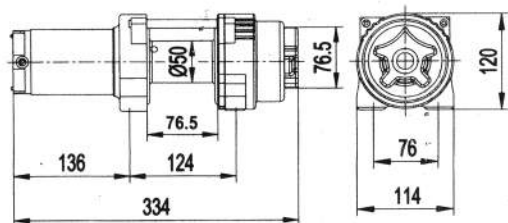

Rated line pull:	1588 kg
Motor:	Series wound 1,5 KM
Voltage:	12V
Gear:	3-stage planetary
Gear ratio:	198:1
Brake:	automatic in the drum
Synthetic rope:	5 mm x 10 m
Fairlead:	Aluminum hawse
Remote:	Wired (handlebar switch)
Dimensions:	334mm x 114mm x 120mm
Drum dimensions:	50mm x 76,5mm
Mounting bolt pattern:	124mm x 76mm
Weight:	8 kg
Motor current draw:	0kg - 15A; 1588kg - 150
Line speed:	0kg - 4.9 m/min ; 1588 kg - 1.8 m/min
Warranty:	2 years





PW9500

With winch you get:

- Wire rope 8,3 x 28 m with hardened core
- Hook
- Roller fairlead
- Control box
- Cables set
- Wireless remote control
- Wire remote control
- Mounting screws set
- User manual
- Warranty card


PW9500 is a professional winch, which is setting the pace for design, durability and functionality. This is the winch destined to raise the bar for the economic winch marketplace! Created from everything we have already learned over the past 13 years, the PowerWinch brings unmatched quality and value.

4310 kgs of Rated Line Pull - really strong, bites almost any application
Weather Sealed 5.5 HP motors - rain, snow and blowing dust resistant
Heavy-Duty 3-Stage Planetary Gearbox - handles torque on demand
Heavy-Duty Drum Supports - maximum load tested all the way to stall

Weather Sealed Solenoid - one of the best on the market, waterproof
Rubber Hand-held Remote - field proven design provides comfortable use
Heavy-Duty Fairlead - brushed finish endures weather and wire rope abuse
Ergonomic Freespool Control - very easy to use - grip and effortless to operate



Specifications

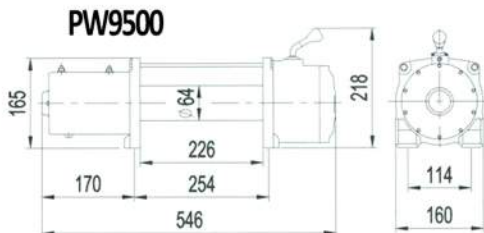

Rated line pull:	4310 kg
Motor:	Sealed 5,5 KM Series wound
Voltage:	12V
Gear:	3-stage planetary
Gear ratio:	218:1
Solenoid:	Weather sealed 500 A HD
Brake:	Automatic
Rope:	wire 8,3mm x 28m
Fairlead:	4-way roller
Steering:	wire and wireless remote
Dimensions:	548mm x 160mm x 218mm
Drum dimensions:	64mm x 226mm
Mounting screw spacing:	254mm x 114,3mm
Weight:	38 kg
Current consumption:	0kg - 80A; 4310kg - 350A
Line pull:	0kg - 7,8 m/min; 4310kg - 2,2 m/min
Warranty:	2 years





PW12000

With winch you get:

- Wire rope 9,5 mm x 28 m
- Hook
- Roller fairlead
- Control box
- Cables set
- Wireless remote control
- Wire remote control
- Mounting screws set
- User manual
- Warranty card

PW12000, same as PW9500, is a professional winch, which is setting the pace for design, durability and functionality. This is the winch destined to raise the bar for the economic winch marketplace! Created from everything we have already learned over the past 13 years, the PowerWinch brings unmatched quality and value.


5443 kgs of Rated Line Pull - really strong, bites almost any application
Weather Sealed 6 HP motors - rain, snow and blowing dust resistant
Heavy-Duty 3-Stage Planetary Gearbox - handles torque on demand
Heavy-Duty Drum Supports - maximum load tested all the way to stall

Weather Sealed Solenoid - one of the best on the market, waterproof
Rubber Hand-held Remote - field proven design provides comfortable use
Heavy-Duty Fairlead - brushed finish endures weather and wire rope abuse
Ergonomic Freespool Control - very easy to use - grip and effortless to operate



Specifications

PW12000

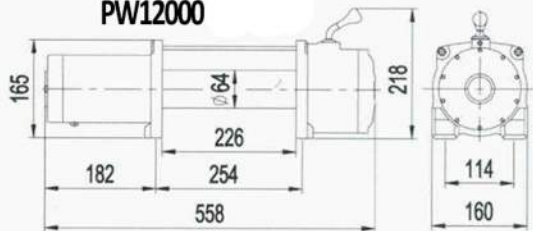

Rated line pull:	5443 kg
Motor:	Sealed 6 KM Series wound
Voltage:	12V or 24V
Gear:	3-stage planetary
Gear ratio:	265:1
Solenoid:	Weather sealed 500 A HD
Brake:	Automatic
Rope:	wire 9,5mm x 28m
Fairlead:	4-way roller
Steering:	wire and wireless remote
Dimensions:	548mm x 160mm x 218mm
Drum dimensions:	64mm x 226mm
Mounting screw spacing:	254mm x 114,3mm
Weight:	42 kg
Current consumption:	12V 0kg - 80A; 5443kg - 380A 24V 0kg - 45A; 5443kg - 240A
Line pull:	12V 0 kg - 7,8 m/min 5443 kg - 2,2m/min 24V 0 kg - 10 m/min 5443 kg - 2,7 m/min
Warranty	2 years



Best sealed 500A Solenoid

IP68 sealing

Hardened gear
Strong brake



New motor and motor
housing

Fast line speed and low amp draw

Stainless steel hardware

PW15000 Extreme

With winch you get:

- Wire rope 11 mm x 26 m
- Hook
- Roller fairlead
- Control box
- Cables set
- Wireless remote control
- Wire remote control
- Mounting screws set
- User manual
- Warranty card


Electric winch PW15000XT is the latest product of PowerWinch, which was created for the most demanding users. Our designers have completed work on a XT series, setting a new quality level on the professional winches market. Excellent sealing, corrugated engine cover and reduced power consumption are some of the distinguishing characteristics of the model under the XT sign.

6804 kgs of Rated Line Pull - really strong, bites almost any application
IP68 Sealed 6,8 HP motors - rain, snow and blowing dust resistant
Heavy-Duty 3-Stage Planetary Gearbox - handles torque on demand
Heavy-Duty Drum Supports - maximum load tested all the way to stall

IP68 Sealed Solenoid - one of the best on the market, waterproof
Rubber Hand-held Remote - field proven design provides comfortable use
Heavy-Duty Fairlead - brushed finish endures weather and wire rope abuse
Ergonomic Freespool Control - very easy to use - grip and effortless to operate



Specifications

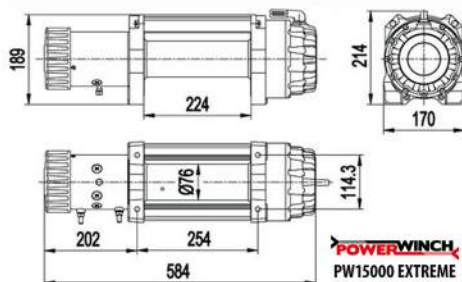

Rated line pull:	6804 kg
Motor:	6,8 KM
Voltage:	12V
Gear:	3-st. planetary
Gear ratio:	262:1
Solenoid:	500 A HD
Brake:	Automatic in the drum
Rope:	Wire rope 11mm x 26m
Fairlead:	4-way roller
Remote:	wired and wireless remotes
Dimensions:	584mm x 170mm x 214mm
Drum dimensions:	76mm x 224mm
Mounting screw spacing:	254mm x 114,3mm
Weight:	46 kg
Current consumption:	0kg - 70A: 6804kg - 420A
Line speed:	0kg - 6 m/min; 6804kg - 1,2 m/min
Warranty:	2 years





PW18000

With winch you get:


- Wire rope 13 mm x 25 m
- Hook
- Roller fairlead
- Control box
- Cables set
- Wire remote control
- Mounting screws set
- User manual
- Warranty card

Electric winch PowerWinch PW18000 has pulling rate at the level of 8182 kg and is one of the strongest winches in our product line , designed for hardest work. There is only 24V version and it meets the requirements of SAE J706 standards and CE.

While working on electric winch PW18000 we've been focused on quality, that's why all of the elements are made of best materials. PW18000 can easily compete with the best devices of similar pulling rates, available on the world market, offering excellent , unprecedented price in the same time. PowerWinch PW18000 has , among others, reinforced cast iron mounting feet, economical engine with a good ratio of current consumption to power dissipation, ergonomic clutch and the best available on the market relays.



Specifications

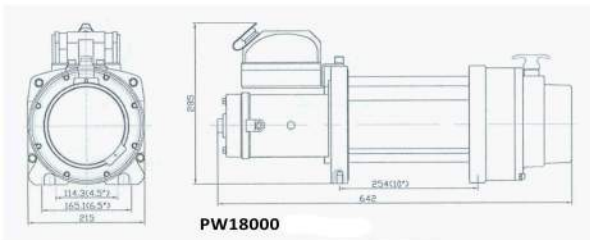

Pull rate:	8182 kg
Motor:	4,7KM
Voltage:	24V
Gear:	4-st. planetary
Gear ratio:	516:1
Solenoid:	500A
Brake:	automatic
Rope:	wire 13mm x 25m
Fairlead:	roller
Remote control:	wired remote
Dimensions:	651mm x 215mm x 295mm
Drum dimensions:	88mm x 220mm
Weight:	78kg
Current consumption:	60A - 280A
Line speed:	0.8 - 3.5 m/min
Warranty:	2 years



Accessories



Snatch block

available in two options:

- up to 13000 lbs
- up to 20000 lbs

Wireless remotes



Classic set



Profi set

Winch accessories set

Available in different versions
from 9500 lbs up to 20000 lbs

1 Set

- tree trunk protector
- snatch block
- 2 shackles
- carrying bag



- universal - suits most of winches
- standard mounting holes
- black painted steel (4 mm)

Mounting plate



Synthetic ropes

Available in different sizes: 6 mm - 12 mm / MBL 3500 kg - 14 000 kg

12-strand UHMWPE

Does not kink

No memory

Extensibility: max. 3%

Resistant to UV light: very good

Moisture regain: none

Resistance to acids and alkali: excellent

Resistance to most chemicals: excellent



- 7x lighter than steel rope
- fully rigged with competition hook and drum terminal
- heat and wear protection
- safer and more comfortable



Synthetic ropes with braided cover

10 mm or 12 mm



Highest abrasion resistance and durability

High breaking strength

Braided cover prevents all grit and dirt from damaging core

New and improved pre-spliced eye offers better strength

Heavy duty stainless steel tube thimble won't rust or corrode



POWERLINE